

12

EUROPEAN PATENT APPLICATION

21 Application number: 89119402.9

51 Int. Cl.⁵: F21V 8/00 , B60Q 1/00

22 Date of filing: 19.10.89

30 Priority: 02.11.88 US 266129

43 Date of publication of application:
09.05.90 Bulletin 90/19

84 Designated Contracting States:
DE FR GB NL


71 Applicant: **GENERAL ELECTRIC COMPANY**
1 River Road
Schenectady, N.Y. 12345(US)

72 Inventor: **Davenport, John Martin**
5128 Edenhurst Avenue
Lyndhurst Ohio 44124(US)
Inventor: **Finch, William Walter**
446 Richmond Park East Nr. 603A
Richmond Heights Ohio 44143(US)
Inventor: **Hansler, Richard Lowell**
28120 Belcourt
Pepper Pike Ohio 44124(US)
Inventor: **Nagle, Richard Charles**
20931 Goller Avenue
Euclid Ohio 44119(US)
Inventor: **White, Ronald Steven**
7797 Hidden Hollow
Mentor Ohio 44060(US)

74 Representative: **Schüler, Horst, Dr. et al**
Kaiserstrasse 69
D-6000 Frankfurt/Main 1(DE)

54 Centralized lighting system employing a high brightness light source.

57 A centralized lighting system particularly suited for aerodynamically styled vehicles is disclosed. The centralized lighting system employs a pressurized lamp preferably of a metal halide type having quartz light guides merged into portions of its outer surface. The portions of the metal halide lamp that are not merged with the light guides may be coated with a diffusive reflective coating that substantially prevents light from being transmitted through the coating so that all of the light generated by the metal halide lamp is directed into and transmitted by the light guides. The transmitted light of the light guide is distributed throughout the vehicle to supply the forward, rearward, and interior illumination needs of the vehicle.

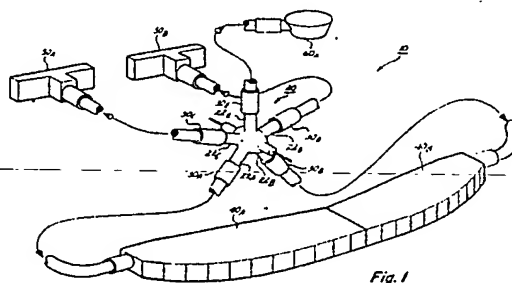

A CENTRALIZED LIGHTING SYSTEM EMPLOYING A HIGH BRIGHTNESS LIGHT SOURCE**BACKGROUND OF THE INVENTION**

5 The present invention relates to a lighting system, and more particularly, to a centralized lighting system especially suited to provide the illumination needs of a vehicle or structure and comprising a high brightness light source which is coupled to optical light carrying devices.

As discussed in U.S. Patent 4,811,172, assigned to the same assignee as the present invention, it is known that fiber optics may be used efficiently to carry the output of a light source to various locations without encountering any substantial transmission losses thereof. The optical fibers in cooperation with the
10 high brightness light source finds various related space restrictive applications such as encountered for aerodynamic styled vehicles.

Similarly, as disclosed in DE-A-3904927, DE-A-3904947 and DE-A-3904926, the efficiency of the lighting systems for aerodynamically styled vehicles may be improved over incandescent light sources by the use of gas discharge lamps serving as the high brightness light source. It is desired that further
15 efficiency improvements be accomplished to the high brightness light source. In addition, it is desired that a single light source be provided and centrally located to serve all of the illumination needs of the aerodynamically styled vehicle. Such a centrally located light source should take into account the needs of the various illuminating devices necessary to provide the forward, rearward, and interior illumination needs of the aerodynamically styled vehicle. Further, it is desired that the centrally located lighting system be
20 provided that efficiently distributes the light generated by the light source while at the same time is accommodated to meet the needs of the vehicle.

Accordingly, it is an object of the present invention to provide a centralized lighting system employing optical fibers that distribute the light throughout the aerodynamically styled vehicle to serve all of the illumination needs of such a vehicle.

25 It is a further object of the present invention to provide a high brightness light source integrated to accommodate the central location and provide all the illumination needs of the automobile.

It is still a further object of the present invention to provide a centralized lighting system wherein the light is distributed in an efficient manner and accommodates the needs of the aerodynamically styled vehicle.
30

SUMMARY OF THE INVENTION

35 The present invention is directed to a centralized lighting system particularly suited for aerodynamically styled vehicles comprising an integrated high brightness light source that is coupled to an optical carrying distribution system.

The light generating and distribution system for the vehicle comprises a light source having an envelope formed of a transparent refractory material, like quartz and containing a suitable fill. The light
40 source further has at least one light guide formed of the same or similar material as the light source and merged into the outer surface of the envelope. The output of the light source is distributed by optical light carrying devices having one end connected to the light source and another end connected to an illuminating device of the vehicle. In one embodiment the optical carrying device comprises a liquid filled arrangement formed of a plastic material, whereas, in another embodiment the optical carrying device comprises a
45 plurality of optical fibers arranged into a bundle.

BRIEF DESCRIPTION OF THE DRAWING

50 Fig. 1 is a schematic illustration of one embodiment of the present invention related to a centralized lighting system that provides the illumination needs of a vehicle.

Fig. 2 is an illustration of a portion of the integrated high intensity light source of the present invention.

Fig. 3 is a perspective illustration of the integrated high intensity light source of the present invention.

Figs. 4(a), (b), and (c) are drawings of various optical carrying devices related to the present invention.

Fig. 5 illustrates the arrangement of an illuminating device related to the invention.

Fig. 6 is a schematic illustrating the lens arrangements that provide the direct and spread light related to the forward illumination needs of a vehicle.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the drawing, Fig. 1 illustrates a centralized lighting system 10 of the present invention. The system 10 illustrated in Fig. 1, for one embodiment of the present invention, provides the forward, rearward and interior illumination needs for aerodynamically styled vehicles such as automobiles or aircraft. The light generating and distribution system is applicable to various means of transportation including but not limited to cars, aircraft, boats, trucks, campers, vans, house trailers, and busses. Further, the light system 10 may be equally applicable to homes, buildings and other various environments.

The light system 10 has a high intensity light source 20 that provides all of the lumens to serve the forward, rearward, and interior illumination needs for a vehicle. The forward illumination is provided by headlamp devices 40_A and 40_B that are respectively coupled to the light source 20 by means of light guides 22_A and 22_B, which, in turn, are respectively coupled to optical carrying devices 30_A and 30_B. The headlamp devices 40_A and 40_B may have features similar to the low profile headlamps disclosed in the previously mentioned U.S. Patent Application Serial No. 123,844. The rearward illumination is provided by illumination devices 50_A and 50_B that are respectively coupled to the light source 20 by means of light guides 22_C and 22_D, which, in turn, are respectively coupled to optical carrying devices 30_C and 30_D. The interior illumination is provided by at least one illuminating device 60_A that is coupled to the light source 20 by means of light guide 22_E which, in turn, is coupled to optical carrying device 30_E. Further details of the light source 20 is shown in Fig. 2.

The light source 20 may have various embodiments of internal means for generating light lodged within a pressurized or vacuum environment, one of such embodiments has the features of a gas discharge lamp having opposite neck portions 24_A and 24_B respectively housing portions of inleads 26_A and 26_B. The inleads 26_A and 26_B are respectively interconnected to molybdenum foils 28_A and 28_B, which, in turn, are respectively connected to electrodes 29_A and 29_B. The electrodes 29_A and 29_B are spaced apart by a distance in the range of about 1mm to about 50mm depending on the wattage of the lamp which may range from as low as 3 watts to several kilowatts.

The light source 20 may be of a pressurized type and may comprise various fills such as described in the previously mentioned DE-A-3904927, DE-A-3904947 and DE-A-3904926.

In one embodiment, the pressurized fill consists of a xenon gas at a pressure in the range of about 10 to about 15,000 torr. In a further embodiment, the light source has a pressurized fill consisting of a metal halide in which the metal is selected from the group consisting of Sodium, Scandium, Thallium, Indium, Tin, Holmium and Thorium and in which the halide is selected from the group consisting of Iodine, Bromine and Chlorine. In this further embodiment, the fill further consists of mercury in the amount of about 5mg to about 50 mg per cubic centimeter of bulb volume along with an inert gas having a pressure in the range from about 10 to about 15,000 torr. In still another embodiment, the light source comprises a tungsten filament disposed therein. The tungsten source may be of a vacuum source or have a pressurized fill of an inert gas selected from the group consisting of Nitrogen, Argon, Krypton, Xenon along with a halogen gas selected from the group consisting of Iodine, Bromine and Chlorine.

For all of the embodiments, the light source 20 preferably has a spherical, elliptical, or tubular shape, an overall length of an amount in the range of about 5mm to about 100mm, a central portion having an outer diameter of about 4mm to about 25mm and a volumetric capacity of about 0.1cm³ to about 30cm³. The integrated light source of the present invention is shown in more detail in Fig. 3.

Fig. 3 is a perspective view showing the metal halide lamp 20 as having a sphere-like shape with five light pipes of a circular cross section having a diameter in the range of about 1mm to about 20mm integrated into the outer surface of the envelope at about its mid-portion. The light source 20 along with cane like light pipes are comprised of a refractory, transparent material like quartz. The light source 20 may also be formed of aluminum oxide or hard glass such as type #180 available from the General Electric Company.

In the practice of the present invention, a light source 20 was formed having five light guides 22 of a diameter of 6mm attached to the mid-section of the envelope. The envelope comprising the light source 20 was formed by localized heating and blowing a 3mm by 5mm outer diameter quartz tube to produce a

12.8mm long by 10mm outer diameter envelope. One end of a pre-cut 6mm quartz solid rod was then heated as well as the area of the envelope to which the rod was to be attached. When the quartz rod was white hot and the area of the envelope to which it was attached was barely white hot, the end of the solid rod was carefully rolled onto the arc tube. Rolling, rather than simply "sticking on" the rod produced a clearer joint for the transmission of light, whereas, by preventing the envelope from becoming white hot, the desired spherical shape of the envelope was not altered. The ends of the solid rods which were not attached to the light guides were lightly fire polished to enhance their light transmission characteristic.

The lamp 20 of the present invention preferably has a diffuse reflective coating 25 on its outer surface. The coating 25 is preferably a finely divided highly reflecting type material selected from the group consisting of zirconium oxide, aluminum oxide, magnesium oxide, thorium oxide and titanium oxide: The reflective coating 25 by being placed on all of the envelope of the light source 20 except for the area of the envelope merged with the light pipes 22_A...22_E, allows for almost all the light generated by the light source 20, that is intercepted by the coating, to be reflected back to and then transmitted by the light pipe 22_A...22_E. The infrared energy is also reflected by the coating so that the temperature of the lamp may be maintained with less power than would be required without the coating, thus increasing the efficiency of the system.

The integrated light source of the present invention correct for a problem related to color separation of illumination generated from gas discharge sources. More particularly, the color emissions produced from various ingredients in the fill of the lamp between its electrodes are commonly geometrically separated from each other wherein a blue-green color may exist substantially between the electrodes and a redish color may be transversely separated therefrom. For automotive applications, the forward illumination generated from such a discharge device may be manifested by having blue-green illumination focussed on one area of the road and the separated redish illumination focussed on another area of the road. Such an off-set illumination pattern may be distracting to a viewer. This color separation problem is substantially eliminated by the practice of the present invention in that the color emissions generated and possibly separated within the confines of the light source are mixed or integrated into a homogenous color as this generated light is passed through and out of the light guides which are merged it its outer surface.

Further, the integrated light source of the present invention having a reflective coating on the parts of its outer surface where there are no light guides forces the generated light to go out the light guides so as to improve the efficiency of light transmission compared to light sources without a reflective coating.

The preferred light transmission of light source 20 may be further enhanced by coating the ends of the light guides that are connected to the optical carrying devices 30 with a coating 27 of a heat (infrared) reflecting film formed from multiple layers which may be of a type disclosed in U.S. Patent 4,588,923 of Hoegler et al. This coating 27 is interposed between the source of light 20 and the optical carrying devices 30 so as to reduce the amount of infrared energy incident on the ends of the optical carrying devices and thereby lower the temperature which the optical carrying devices must accommodate while at the same time increasing the efficiency of the system. Further, a multilayer dielectric coating may be used to produce a particular color of light in the light guide and reflect other colors including infrared radiation back into the light source to increase efficacy.

The light source 20 consisting of an integrating sphere having the quartz light pipes 22_A...22_E emerging therefrom, provides for an increase in the amount of light that may be developed by such a light source. This is accomplished, in part, in that the ends of the light pipes 22_A...22_E, being located a relatively long distance away from the intense arc condition of the light source 20, are cool relative to prior art devices and they may be further cooled by coupling to plastic optical fibers or liquid filled light guides 30_A...30_E. The coolness provided by the light guides sets up an environment in which the inside surface of the light source 20 is cooled by thermal conduction into the light guides allowing for the light source to be more heavily loaded, that is, for the energy density within the light source to be higher than for a similar lamp without the light guides. Such increases are accomplished while still maintaining an acceptable inner wall temperature for longer life. For example, the light source 20 operates with an energy density two times higher than similar lamps and with a wall temperature that is not increased relative to similar lamps thereby providing an anticipated life which is the same as similar lamps.

For the dimensions and ingredients previously given for the light source 20, the amount of light developed may be from about 2,500 lumens to about 5,000 lumens. The percentage of the light output that is segmented into the light pipes is almost directly related to the relative area between the light pipes themselves. For example, for a 10mm diameter lamp 20 that develops a total amount of lumen output of 2,500 lumen and has merged at its mid-portion five quartz light pipes of a 6mm diameter, the amount of light emitted from each light guide will be about 500 lumens. The 2,500 lumens emitted from the lamp 20 and distributed by the light guides is sufficient to meet all of the lighting needs of an automobile. It is

desired that for the security provided by redundancy, that at least two lamps 20 be provided for automotive applications. The light developed by the light source 20 may be distributed throughout the automobile by means of optical carrying devices 30 having various embodiments shown in Figs. 4(a), 4(b) and 4(c).

The optical carrying devices 30_A...30_E of the present invention have somewhat of an advantage relative to their weight compared to copper wires typically used within a lighting system for an automobile. Further, the relatively cool ends of the light guides 22_A...22_E to which the optical carrying devices mate allow for the usage of optical devices that may otherwise be disadvantageously susceptible to heat such as a liquid filled fiber optic device 30_A shown in Fig. 4(a) as related to light guide 22_A or the plastic fibers frequency used in bundles as shown in Figs. 4(b) and 4(c). The liquid fill fiber optic device 30_A may be in the form of a plastic tube formed of a heat shrink material so that the outer coating 32 of the device 30_A is placed over and shrunk onto the solid light guide 22_A on one end, and similarly, on the other end over and shrunk onto the related illuminating device 40_A as shown in Fig. 4(a). Conversely, for another embodiment the optical carrying device 30_A, the heat shrink material need only cover the outer surface which mates with the light guide 22_A as shown in Fig. 4(b).

The liquid filled fiber optic device 30_A may consist of a high index of refraction liquid 34 selected from the group of materials of ethylene glycol, alcohol, carbon disulfide, and water. The end of the liquid filled fiber optic device 30_A which mates with an illuminating device, such as 40_A, is plugged with a glass or quartz cylindrical rod 36 which serves to couple light into the illuminating device 40_A.

A further embodiment of the optical device 30_A may comprise a single fiber optic light guide where the light conducting medium is selected from the group consisting of glass, quartz, and acrylic and wherein such a medium may be clad with a layer of a material of a lower index of refraction. Another embodiment of an optical carrying device 30_A is shown in Fig. 4(b) as comprising a plurality of optical fibers 38₁, 38₂, and 38_N. The fiber optics may have a cladding material place on their outer surface and arranged into a bundle. For such an arrangement, the inner light conduction medium is commonly of a quartz material, and a cladding of a low index material preferably separates the inner medium from the outer surface commonly formed of a tefzel material.

The fibers may also be of plastic or the plastic coated silica (PCS) type and preferably consist of a bundle enclosed in a casing of nineteen (19) members each having one end pressed directly onto the light guides 22_A and the other end merged or placed onto the illuminating device 40_A. The number 19 is preferred in that it forms a symmetrical hexagon pattern which is the most efficient packing of optical fibers to arrange for a circular spot of light. It is also preferred that a grease or liquid be interposed between the light transmission mediums so as to match the index of refraction of the mating mediums and increase the coupling therebetween.

An advantage of the use of optical fibers as the transmission medium for conducting light generated by the light source, is that the flexible characteristic of the fiber allows for bending the fibers with minimal light loss. Table 1 shows typical suggested bend radius for fibers of different diameters.

TABLE 1

Diameter of Fiber (mm)	Minimum Bend Radius (mm)
0.25	10
0.50	12
0.75	14
1.00	16

Although for the embodiments illustrated in Figs. 4(a) and (b) the light guide is joined to the light source, the practice of this invention contemplates that the light guide may be coupled to the light source without the physical mating therebetween. It is preferred that the maximum light be transferred between these mediums and therefore joining therebetween is desired as shown in Figs. 4(a) and 4(b). Another advantage of the bundled fiber light guides or of solid light guides of Figs. 4(a) and 4(b), is that the ends of these devices may be made into a variety of shapes for optical transmission considerations. For example, as shown in Fig. 4(c) one end of bundled optical fibers 38 may be arranged into a circular shape having the same outer diameter as the diameter of the light guides 22_A...22_E so that essentially all the light conducted by the light guide 22_A...22_E is transmitted into the optical fiber bundle 38. Similarly, the other end of the optical fiber bundle 38 may be arranged into a rectangular arrangement so as to fit into an illuminating

device in an advantageous manner. An important consideration for the various arrangements is that the cross sectional area of the opposite one or more ends be substantially the same.

The amount of light transmitted from the light guides 22_A...22_E to the fiber bundle 38 may be increased by providing more efficient mating between the surfaces of the devices. For example, one of the major limiting factors of the efficient collection of light into a bundle of optical fibers is the amount of the bundle end area which is active fiber core relative to the overall end area. A bundle of several 1,000 micron plastic coated commercial silica (PCS) fibers may have a theoretical maximum of about 46% active core area relative to the available overall end area. A bundle of 19 fibers arranged in hexagon array may typically have only 33% active core area relative to the overall end area. Low core area active factors results in a loss of from about one-half to two-thirds of the lumens generated by the light source that is present at the bundle interface. The light losses are greatly reduced by the practice of the present invention using higher active core area fractions typically about 80% which is primarily made possible by removing the protective coating between fibers from the interior of the bundle and allowing the protective coating to remain only on the outside of the bundle. It is estimated that such protective coating removal increases the lumens coupled into the bundle of fibers by a factor of about 150%.

The utilization of one rectangular region of the fiber optic 38 of Fig. 4(c) to serve the needs of the automotive is shown more clearly in Fig. 5. Figure 5 illustrates the illuminating device 40_A, also shown in Fig. 1, as comprising a plurality of optical light carrying devices 42₁, 42₂, 42₃, 42₄, 42₅, 42₆, 42₇, 42₈, 42₉, and 42₁₀ which respectively cooperate with lens elements 44₁, 44₂, 44₃, 44₄, 44₅, 44₆, 44₇, 44₈, 44₉, and 44₁₀ so that the light generated by the integrated light source is transmitted from the vehicle in line of light distribution in a manner similar to that disclosed in the previously mentioned U.S. Patent Application Serial No. 123,844.

The light emitted from optical devices 42₁ ... 42₁₀ is confined or focussed into various rectangular apertures so as to provide for a desired illumination pattern. For the embodiment shown in Fig. 5, three apertures 46_A, - 46_B, and 46_C of increasing relative dimensions are respectively provided for optical devices 42₁, 42₂, 42₃, - 42₄, 42₅, 42₆, - and 42₇, 42₈, 42₉, and 42₁₀. Such an arrangement provides a tapered array in which the maximum light is transmitted by optical devices 42₁, 42₂, and 42₃ and decreases in selected amounts toward devices 42₇, 42₈, 42₉, and 42₁₀.

The principles of the present invention of utilization of a rectangular portions such as 54_A, 54_B, and 54_C to provide desired illumination needs of an automotive may be followed for the selection of the lens elements that may be utilized to provide forward and rearward illumination for the vehicle. For example, such lens elements used for automotive application have a typically low F number and are used to focus the image appearing at the ends of the optical fiber bundle at about 60 ft. from an automobile application which is very large (infinity) when compared to a lens diameter of about 1.5 inches. The low F number lens having a diameter of 1.5 inches may be cut down to a one inch square so as to eliminate any lost space in a one inch tall lens array 40_A shown in Fig. 5. It is also desired to use aspherical lenses in automotive applications to reduce the spherical aberrations which may be significant in related low F number lenses.

Some of the low F number aspheric lenses may be replaced by aspheric cylindrical lenses which only focus the beam in the vertical direction and allow it to spread in the horizontal direction. This reduces any glare in the eyes of the oncoming driver but provides a widely spread beam from curb to curb. The achievement of such a beam pattern may be described with reference to Fig. 6.

Fig. 6 illustrates two (2) aspheric cylindrical lenses 70 and 72 arranged about a center line 74 and interposed between a square-like object 76 and a rectangular image 78. The cylindrical portions of lenses 70 and 72 are off-set from each other by an angle of about 90 degrees. The lens 70 magnifies the light rays initiating from object 76 in a horizontal direction, whereas, lens 72 magnifies these same rays in a vertical direction. The combined operation of lenses 70 and 72 develop the rectangular image 78. The aspect ratio of the image 78 depends on the selected focal lengths. The selection of different focal lengths results in different magnifications in the vertical and horizontal directions. As shown in Fig. 6, a square-like object 76 forms a rectangular image 78. An advantage of the arrangement of Fig. 6 is that different rectangular images may be developed from identical objects.

It should now be appreciated that the practice of the present invention provides for a centralized lighting system having a high brightness light source formed into an integrated sphere having light guides attached thereto with one of their ends connected to optical carrying devices which may conduct the light into various lens and illuminating device arrangements.

It should be further appreciated that the light guides emanating from the light source act as heat sinks which allows for the operation of a light source at an increased power providing more light therefrom but maintaining its temperature and therefore its anticipated life thereof. The light source also is fed into bundles of fiber optics which have their ends arranged into the various shapes to serve the needs of the

illumination patterns desired for an automobile. The usage of the bundled fibers is also disclosed in which the protective material normally present is removed from each of the optical fibers so that the amount of lumens coupled into the bundle may be increased to the prior art methods by a factor of about 50%. Further, the small dimensions of the fiber optics related to the present invention allow for more uniform light patterns to be focused onto the road. The usage of cylindrical aspheric lenses in place of circular aspheric lenses allows for the light generated by the present invention to be focused into the vertical and horizontal directions to respectively serve as direct and spread light for the automobile.

Further still, the light source of the present invention integrates the generated light into a homogenous color unlike some prior art discharge devices manifesting color separation of its illuminated pattern. Further, the integrated light source of the present invention has a reflective coating on the parts of its outer surface where there are no light guides so as to force the generated light to go out the light guides in a manner to improve the efficiency of light transmission compared to light sources without a reflective coating.

Still further, the high intensity light source of the present invention may have a heat reflective filter interposed between the light source and the optical fiber so as to reduce the amount of energy incident upon the fibers. Further, the light source may have a filter that blocks the transmission of ultraviolet radiation which may otherwise degrade epoxy and plastic components related to the light generating system. Further still, a diffuse reflective coating may be placed on the light source to enhance the amount of lumens that is transmitted by the light guides.

Claims

1. A light source comprising;

(a) an envelope formed of a light transmissive material and having internal light generating means;

and (b) at least one light guide formed of a light transmissive material and merged into the outer surface of said envelope.

2. A light source according to claim 1 wherein said envelope is formed of a refractory transparent material selected from the group consisting of quartz, aluminum oxide and hard glass.

3. A light source according to claim 1 wherein said light guide is formed of a refractory transparent material.

4. A light source according to claim 1 wherein said light generating means comprises a tungsten filament disposed therein.

5. A light source according to claim 4 wherein said envelope contains a pressurized fill is of an inert gas selected from the group consisting of Nitrogen, Argon, Krypton and Xenon along with a halogen gas selected from the group consisting of Iodine, Bromine, and Chlorine.

6. A light source according to claim 1 wherein said envelope has a shape selected from the group of shapes consisting of spherical or elliptical.

7. A light source according to claim 1 wherein such light generating means comprises a pair of electrodes one of each being positioned at opposite ends of said envelope.

8. A light source according to claim 1 wherein said envelope contain a pressurized fill which consists of a xenon gas at a pressure in the range of about 10 to about 15,000 torrs.

9. A light source according to claim 1 wherein said envelope contains a pressurized fill consist of a (1) a metal halide in which the metal is selected from the group consisting of Sodium, Scandium, Thallium, Indium, Tin, Holmium and Thorium and in which the halide is selected from the group consisting of Iodine, Bromine and Chlorine, (2) mercury in the amount of about 5mg to about 50mg per cubic centimeter of bulb volume and (3) an inert gas having a pressure in the range from about 10 torr to about 15,000 torr.

10. A light source according to claim 1 wherein the outer surface of said envelope, except at the merger of said at least one light guide, has a coating of a finely divided highly reflecting type material selected from the group consisting of zirconium oxide, thorium oxide and titanium oxide.

11. A light source according to claim 1 wherein one end of said at least one light guide has a coating of an infrared reflecting film.

12. A light source according to claim 1 wherein one end of said at least one light guide has a coating which blocks the transmission of ultraviolet radiation.

13. A light source according to claim 1 wherein one end of said at least one light guide has a coating that produces a particular color and reflects other colors including infrared radiation back into said light source.

14. A light source according to claim 1 wherein said envelope comprises;

- (a) a volumetric capacity in the range of about 0.1cm³ to about 30cm³; and
- (b) an overall length of about 5mm to about 100mm; and
- (c) a central portion having an outer diameter of about 4mm to about 25mm.

15. A light source according to claim 1 wherein said light guide comprises

5 a solid cylindrical member having a diameter of about 1mm to about 10mm and a length of about 5mm to about 50mm.

16. A light source according to claim 7 wherein said electrodes are spaced apart from each other by a distance in the range of about 1mm to about 50mm.

17. A light generated and distribution system comprising;

10 (a) a light source comprising an envelope formed of a light transmissive material and having internal generating means, said light source further comprising at least one light guide formed of a light transmissive material and merged into the outer surface of said envelope;

(b) at least one optical light carrying device respectively coupled at one end of each of said light guide; and

15 (c) an illuminating device connected to the other end of said respective optical light carrying device.

18. A light generating and distribution system according to claim 17 wherein one end of said at least one light guide has a coating of an infrared reflecting film.

19. A light generating and distribution system according to claim 17 wherein one end of said at least one light guide has a coating which produces a particular color and reflects other colors including infrared radiation back into light source.

20. A light generating and distribution system according to claim 17 wherein one end of said at least one light guide has a coating which blocks the transmission of ultraviolet radiation.

21. A light generating and distribution system according to claim 17 wherein said optical carrying device comprises;

25 a transparent liquid filled fiber optic cable having an outer coating formed of a heat shrink plastic material that is shrunk onto one end of said respective light guide, said liquid filled optic fiber cable further having a transparent cylindrical plug closing its other end.

22. A light generating and distribution system according to claim 21 wherein said fiber optic cable is filled with a high index of refraction liquid selected from the group consisting of ethylene glycol, alcohol, carbon disulfide, and water.

23. A light generating and distribution system according to claim 17 wherein said optical carrying device comprises;

30 a single fiber optic light guide where the light conducting medium is selected from the group consisting of glass, quartz, and acrylic and which medium is clad with a layer of a material of a lower index of refraction.

24. A light generating and distribution system according to claim 17 wherein said optical carrying device comprises;

a plurality of optical fibers arranged into a bundle which is devoid of any cladding material between fibers but has a protective coating covering the outer surface of bundle.

40 25. A light generating and distribution system according to claim 17 wherein said optical carrying device comprises;

a plurality of optical fibers having a cladding material on their outer surface.

26. A light generating and distribution system according to claim 17 wherein said optical carrying device has a circular shape at said end connected to said light guide which is affixed to the light source.

45 27. A light generating and distribution system according to claim 17 wherein said optical carrying device light pipe has a rectangular shape at said end connected to said illuminating device.

28. A light generating and distribution system according to claim 24 wherein said optical fibers are arranged into a circular array at said end connected to said light guide which is affixed to the light source.

50 29. A light generating and distribution system according to claim 24 wherein said optical fibers are arranged into a rectangular array at said end connected to illuminating device.

30. A light generating and distribution system according to claim 17 further comprising;

55 a first and a second lens element offset from each other by an angle of about 90 degrees and interposed at a predetermined distance between said at least one respective optical carrying device and said illuminating device, said first lens being capable of controlling light transmitted from said illuminating device in a horizontal manner and said second lens being capable of controlling the light transmitted from said illuminating device in a vertical manner.

31. A light generating and distribution system according to claim 17 wherein said illuminating device comprises;

a plurality of optical carrying devices having an aperture of predetermined dimensions for allowing light to pass therethrough, and
a plurality of lens elements arranged to be respectively coupled to said optical carrying devices.

5

10

15

20

25

30

35

40

45

50

55

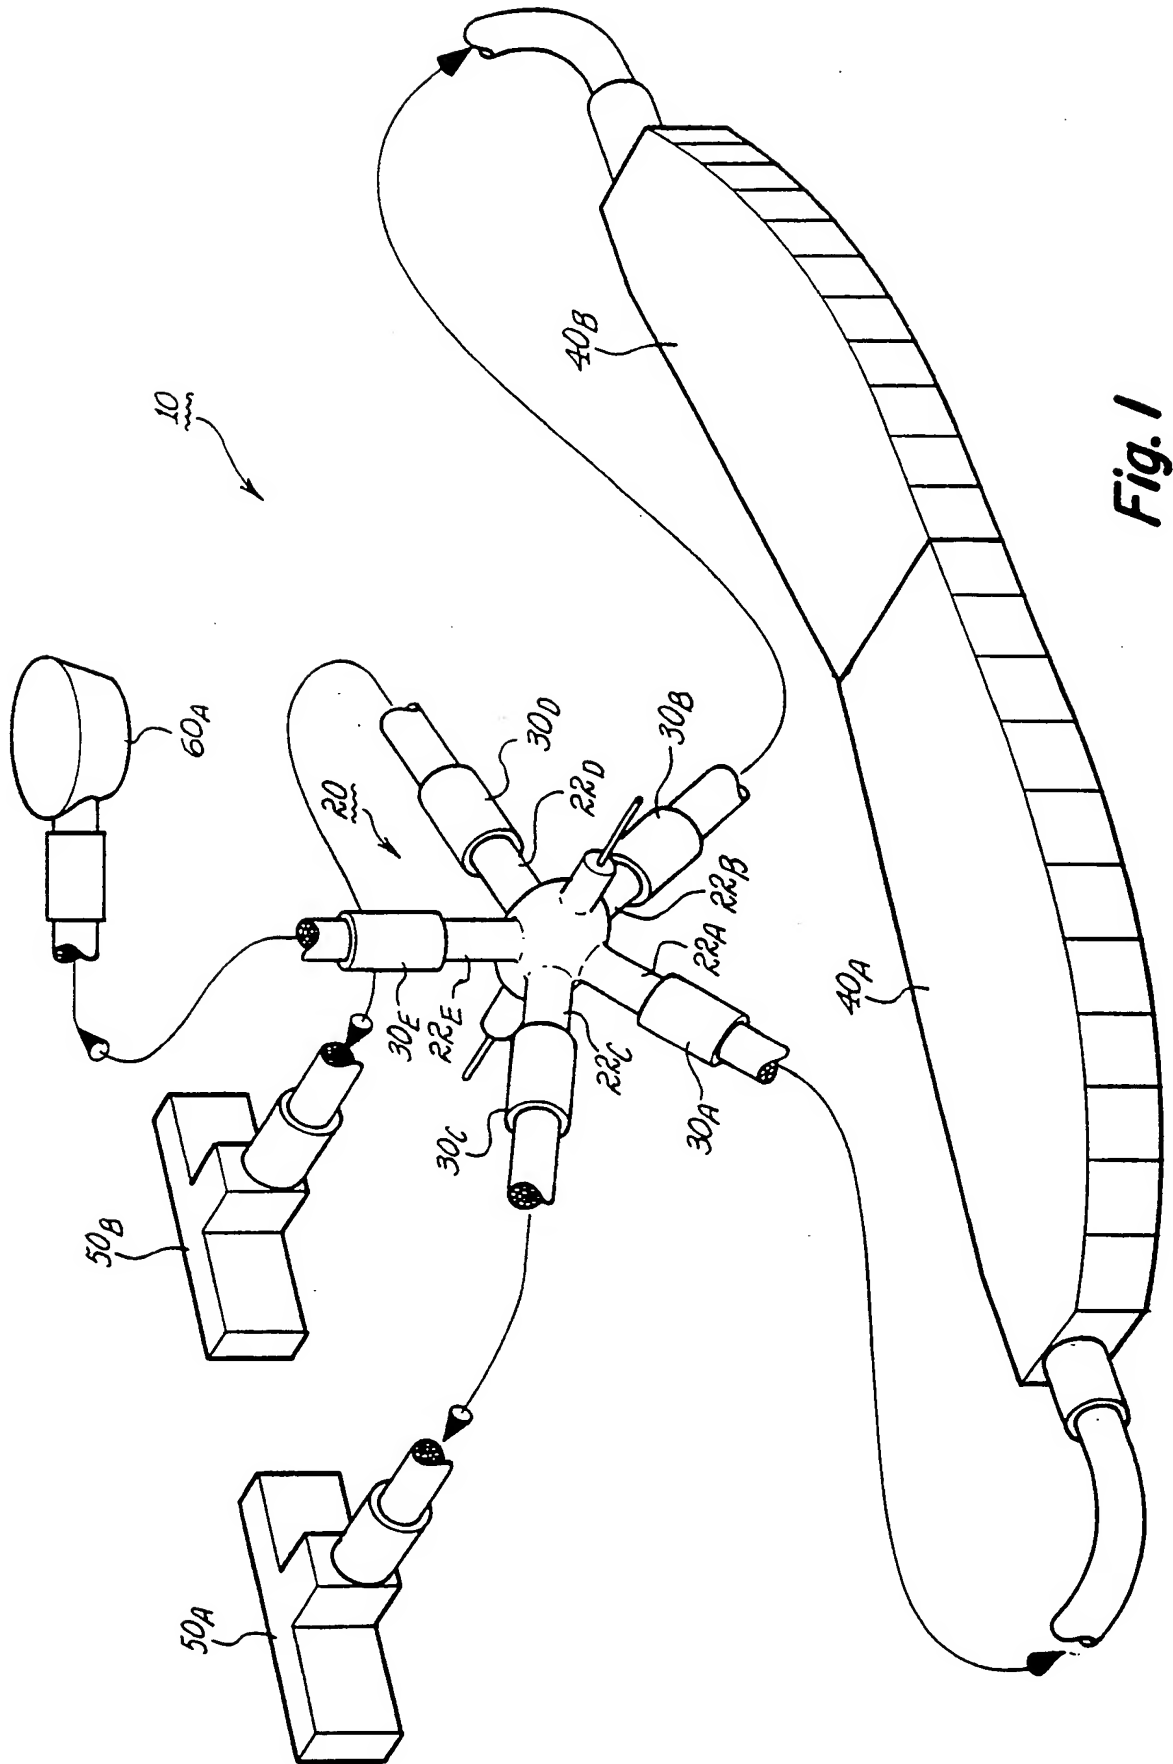
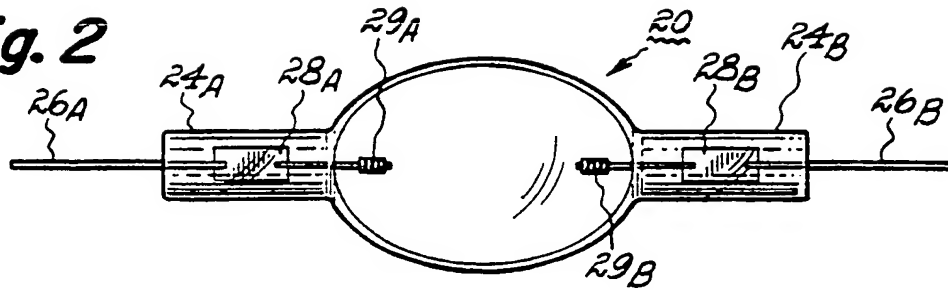
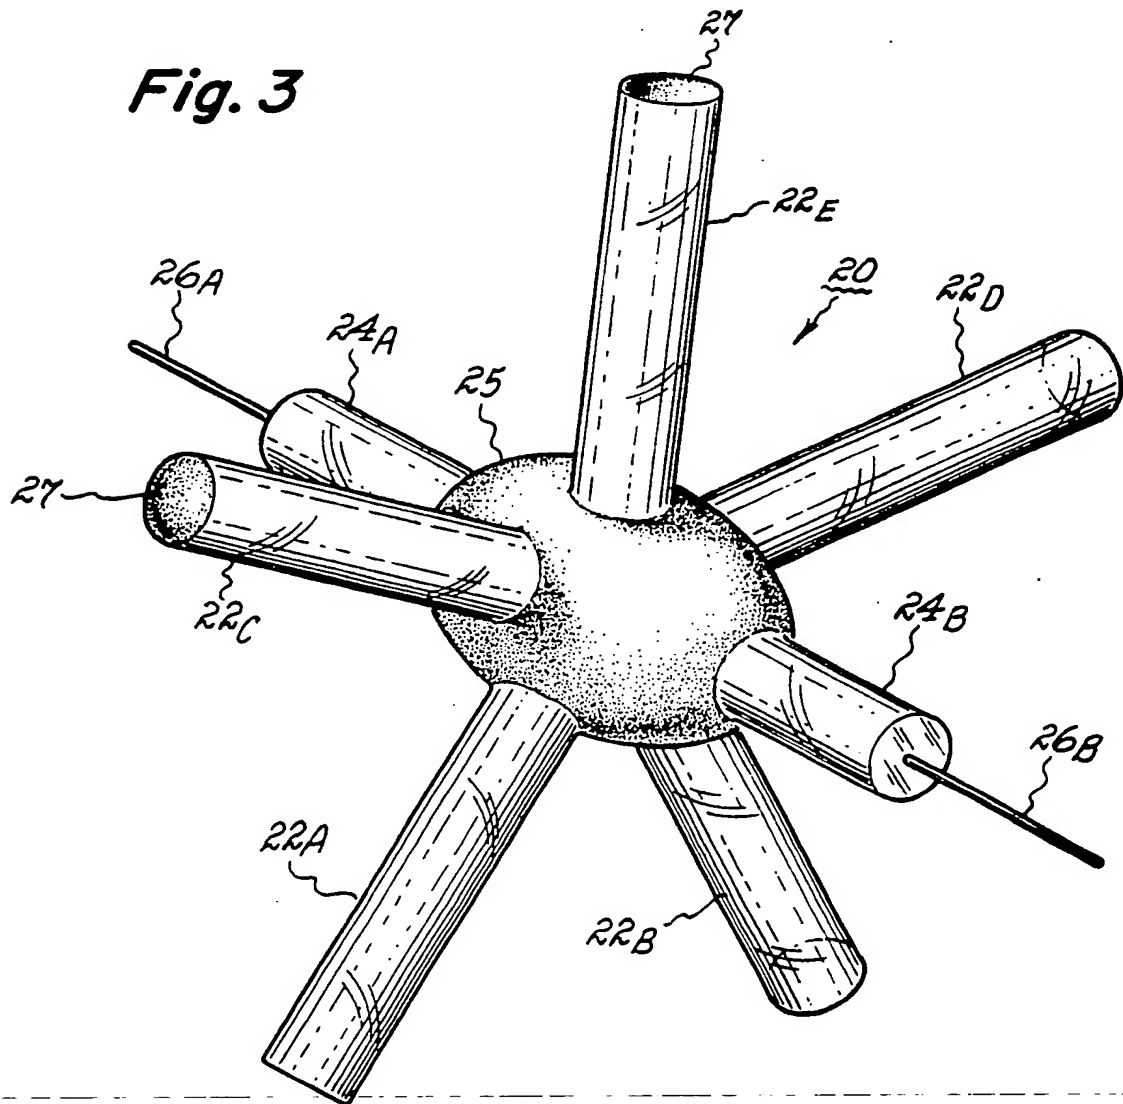


Fig. 2**Fig. 3**

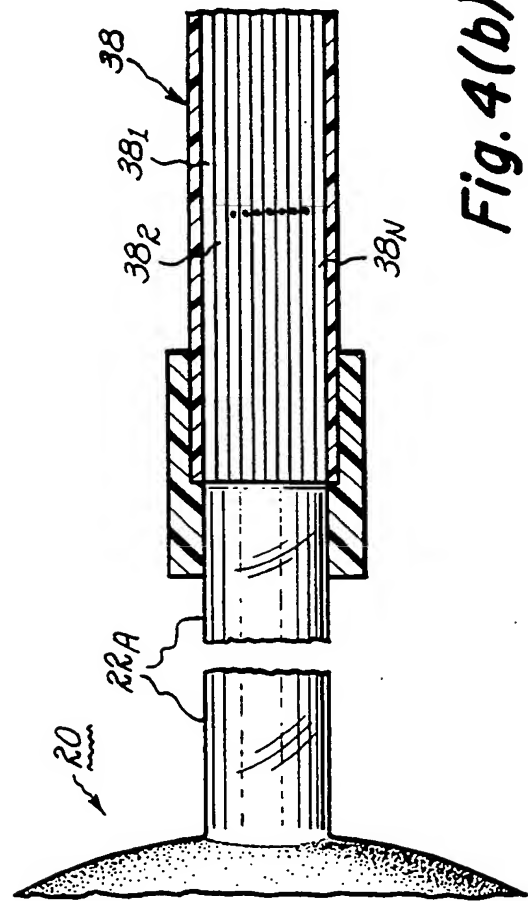
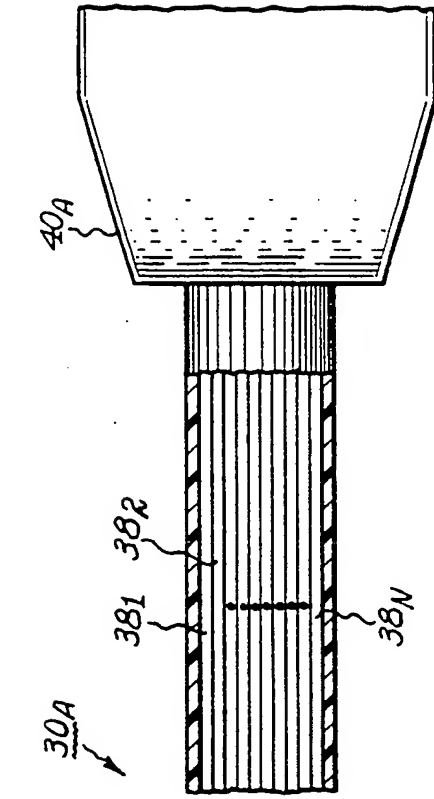
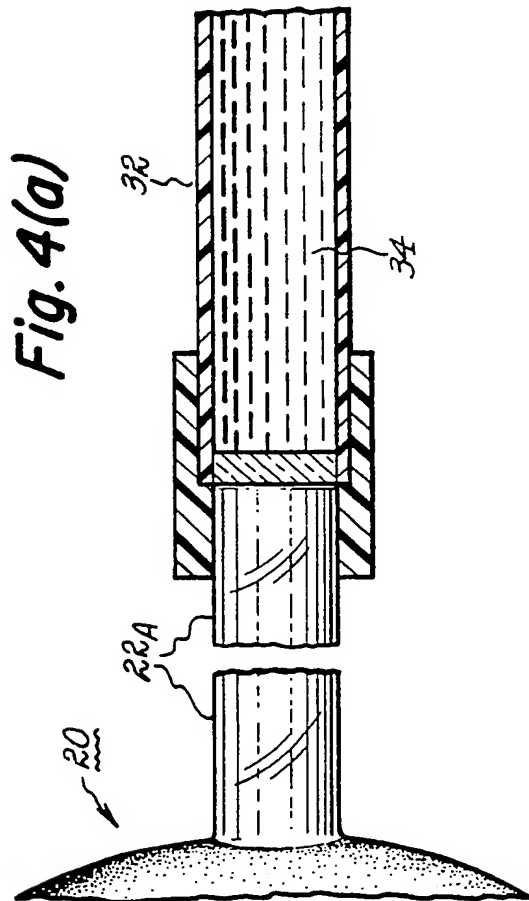
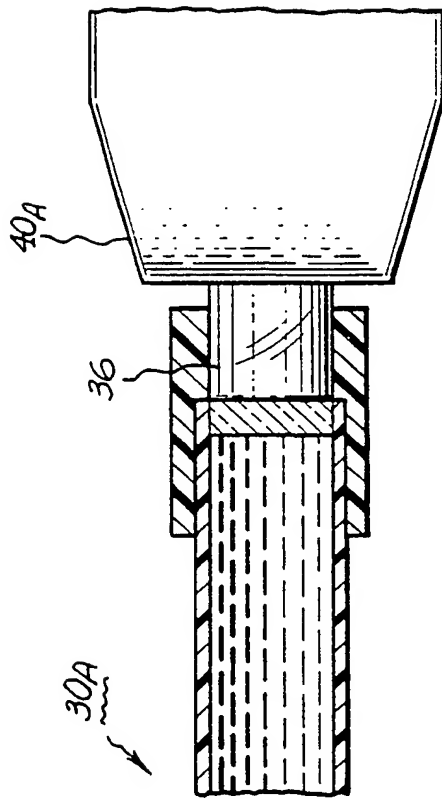


Fig. 4(a)

Fig. 4(b)

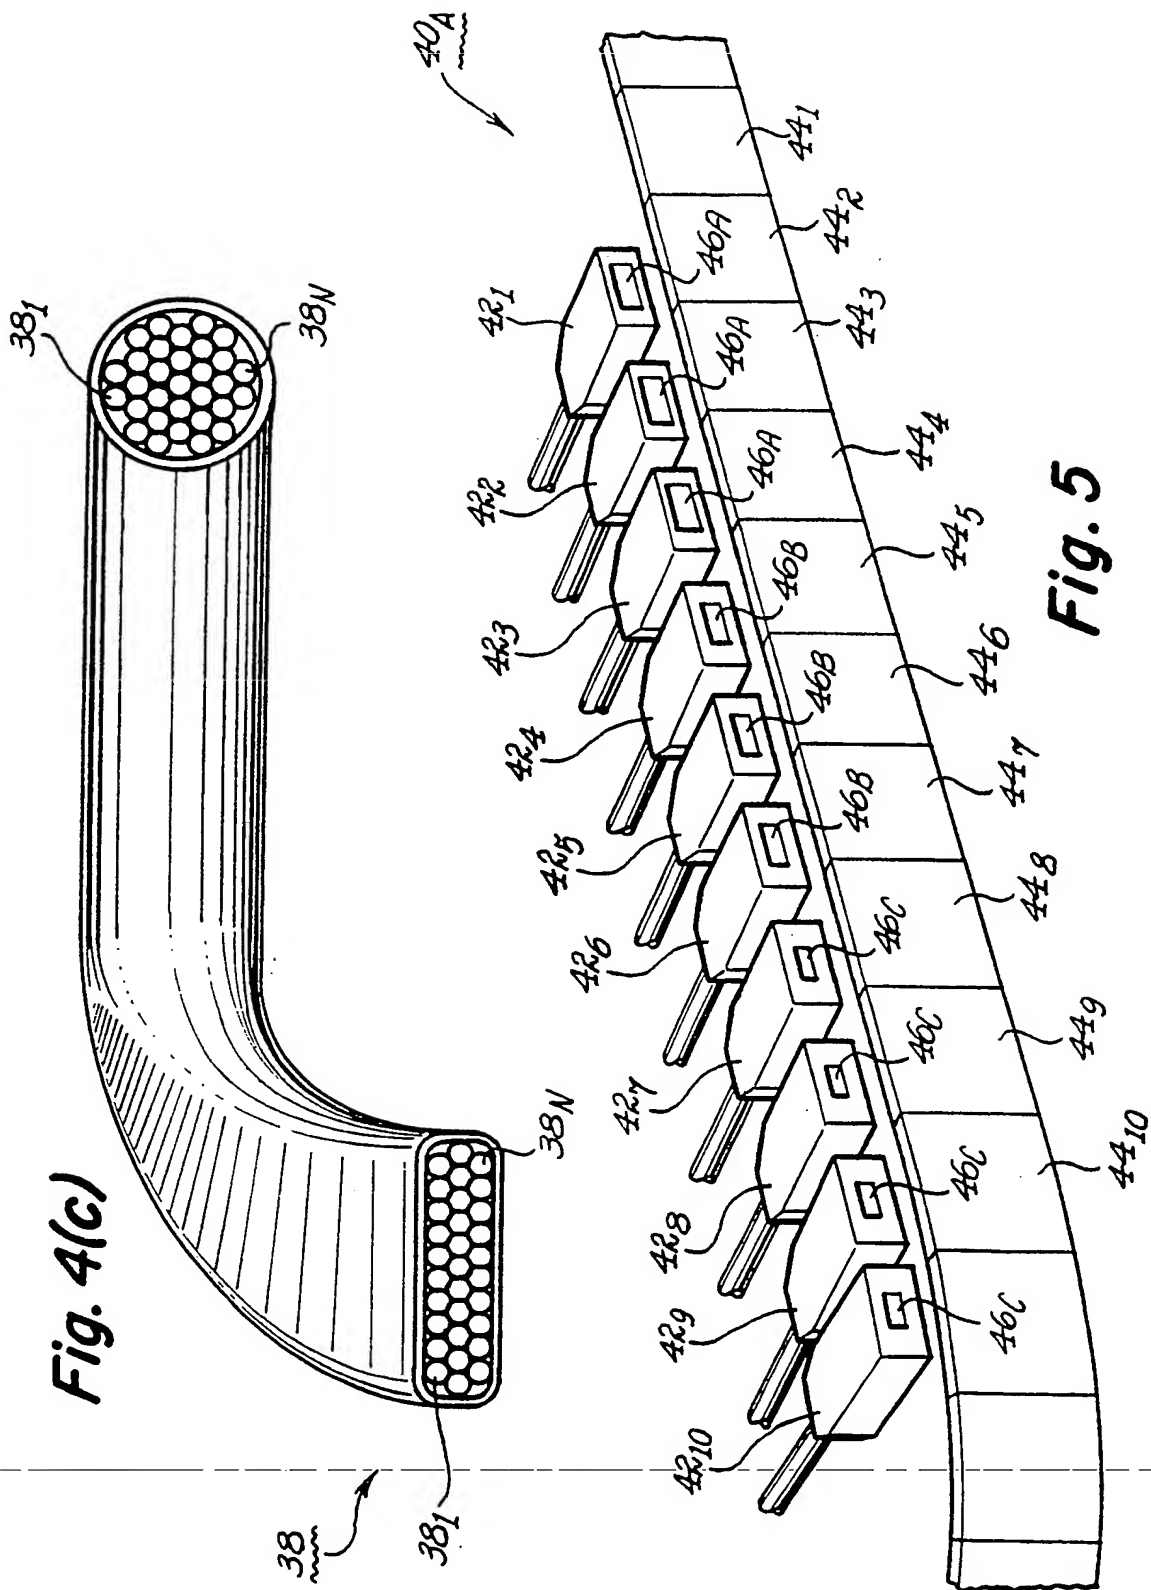


Fig. 4(c)

Fig. 5

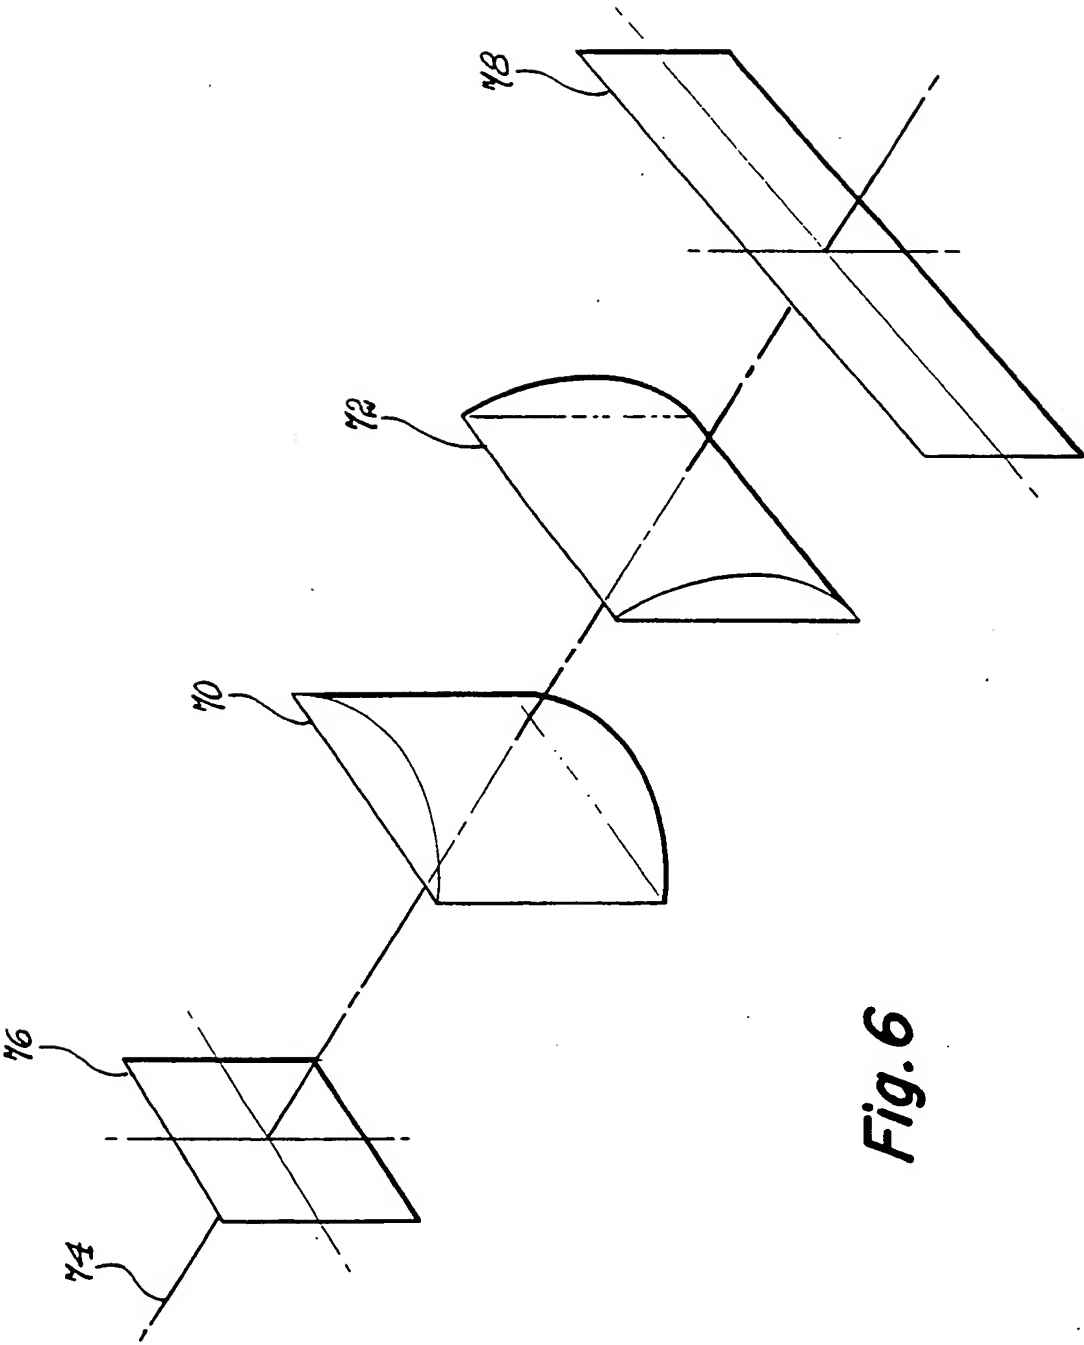


Fig. 6



Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

**0 367 032
A3**

EUROPEAN PATENT APPLICATION

Application number: 89119402.9

Int. Cl.⁵: F21V 8/00, B60Q 1/00

Date of filing: 19.10.89

Priority: 02.11.88 US 266129

Date of publication of application:
09.05.90 Bulletin 90/19

Designated Contracting States:
DE FR GB NL

Date of deferred publication of the search report:
05.09.90 Bulletin 90/36

Applicant: **GENERAL ELECTRIC COMPANY**
1 River Road
Schenectady, NY 12345(US)

Inventor: **Davenport, John Martin**
5128 Edenhurst Avenue

Lyndhurst Ohio 44124(US)
Inventor: **Finch, William Walter**
446 Richmond Park East Nr. 603A
Richmond Heights Ohio 44143(US)
Inventor: **Hansler, Richard Lowell**
28120 Belcourt
Pepper Pike Ohio 44124(US)
Inventor: **Nagle, Richard Charles**
20931 Goller Avenue
Euclid Ohio 44119(US)
Inventor: **White, Ronald Steven**
7797 Hidden Hollow
Mentor Ohio 44060(US)

Representative: **Schüler, Horst, Dr. et al**
Kaiserstrasse 69
D-6000 Frankfurt/Main 1(DE)

Centralized lighting system employing a high brightness light source.

A centralized lighting system (10) particularly suited for aerodynamically styled vehicles is disclosed. The centralized lighting system employs a pressurized lamp (20) preferably of a metal halide type having quartz light guides (22A, 22B) merged into portions of its outer surface. The portions of the metal halide lamp that are not merged with the light guides may be coated with a diffusive reflective

coating that substantially prevents light from being transmitted through the coating so that all of the light generated by the metal halide lamp is directed into and transmitted by the light guides. The transmitted light of the light guide is distributed throughout the vehicle to supply the forward (40A, 40B), rearward (50A, 50B) and interior (60A) illumination needs of the vehicle.

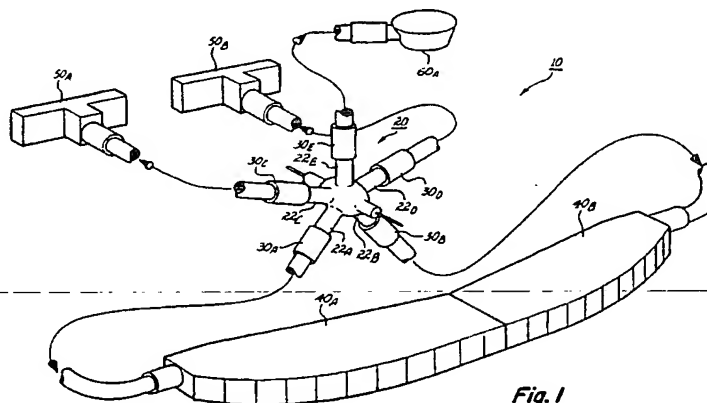


Fig. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 89 11 9402

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	US-A-3567917 (DALEY) * the whole document *	1-3	F21V8/00 B60Q1/00
Y		17	
A		25	
Y	GB-A-2066444 (CIBIE PROJECTEURS) * the whole document *	17	
A		6, 10, 31	
A	US-A-4740870 (MOORE ET AL) * column 3, lines 55 - 67; figures 2, 3 *	1-3, 10	
A	EP-A-0128551 (GTE PRODUCTS) * page 4, line 23 - page 5, line 1 * * page 6, lines 17 - 19; figure 1 *	4-7, 9	
A	EP-A-0220633 (GENERAL ELECTRIC) * column 7, lines 13 - 36; figure 2 *	5, 8, 9	
A	US-A-3641332 (REICK ET AL) * column 3, lines 58 - 65 *	4, 11, 18	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
A	EP-A-0003312 (EPE FABRIK PHARMAZEUTISCHER PRAPARATE) * page 8, lines 1 - 22; figure 1 *	12	F21V H01J
A	DE-A-3704872 (NATH) * column 3, lines 33 - 44 *	21	
A	US-A-4730895 (STEDBAND) * column 2, lines 25 - 56; figure 2 *	25-30	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18 JUNE 1990	Examiner VAN OVERBEEKE J.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 150 03.82 (P0401)